


zapraszamy do zapoznania się z całą ofertą pomp na stronach

www.interpump.pl
www.pratissoli.pl


Seria LK

model	Przepływ	Ciśnienie max	Moc	Waga	Wymiary
LK 36	140/152/154 l/min.	400 bar	118 kW	373 kg	929,5x672x386,5 mm
LK 40	173/188/190 l/min.	350 bar	127 kW	373 kg	929,5x672x386,5 mm
LK 45	218/238/241 l/min.	280 bar	129 kW	373 kg	929,5x672x386,5 mm
LK 50	269/294/297 l/min.	230 bar	130 kW	383 kg	941,5x672x406 mm
LK 55	326/355/360 l/min.	190 bar	131 kW	383 kg	941,5x672x406 mm
LK 60	388/423/428 l/min.	160 bar	131 kW	383 kg	941,5x672x406 mm

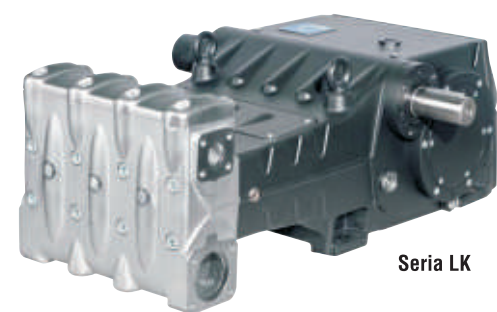

Seria HF

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
HF 18	30 l/min.	600 bar	800	35,5 kW	63 kg	507x367x240 mm
HF 20	38 l/min.	500 bar	1000	36,8 kW	63 kg	507x367x240 mm
HF 22	47 l/min.	400 bar	1000	36,8 kW	63 kg	507x367x240 mm
HF 25	57 l/min.	350 bar	1000	36,8 kW	63 kg	507x367x240 mm
HF 25	74 l/min.	280 bar	1000	39,0 kW	63 kg	507x367x240 mm



Seria VF

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
VF 12	12,5 l/min.	1500 bar	750	36,8 kW	63 kg	607x384x237 mm
VF 14	15 l/min.	1200 bar	900	36,8 kW	63 kg	607x384x237 mm
VF 14	17 l/min.	1100 bar	750	36,8 kW	63 kg	607x384x237 mm
VF 14	23 l/min.	800 bar	1000	36,8 kW	63 kg	607x384x237 mm



Seria VK

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
VK 12	20 l/min.	1500 bar	1500/1800/2200	55,0 kW	79,5 kg	645x501x237 mm
VK 14	28 l/min.	1100 bar	1500/1800/2200	55,0 kW	79,5 kg	645x501x237 mm



Seria VS

model	Przepływ	Ciśnienie max	Moc	Waga	Wymiary
VS 16	27/27/26 l/min.	1500 bar	75 kW	280 kg	853x604x316 mm
VS 18	34/34/33 l/min.	1200 bar	75 kW	280 kg	853x604x316 mm
VS 20	42/42/41 l/min.	900 bar	75 kW	280 kg	853x604x316 mm
VS 22	50/50/49 l/min.	750 bar	75 kW	280 kg	853x604x316 mm
VS 24	60/61/59 l/min.	600 bar	75 kW	280 kg	853x604x316 mm



Seria SK

model	Przepływ	Ciśnienie max	Moc	Waga	Wymiary
SK 20	43/44 l/min.	1500 bar	123/126 kW	387,5 kg	1064,5x672x348,5 mm
SK 22	52/53 l/min.	1300 bar	129/132 kW	387,5 kg	1064,5x672x348,5 mm
SK 24	62/63 l/min.	1100 bar	130/132 kW	387,5 kg	1064,5x672x348,5 mm
SK 26	73/74 l/min.	900 bar	126/127 kW	387,5 kg	1064,5x672x348,5 mm
SK 28	84/86 l/min.	800 bar	128/132 kW	387,5 kg	1064,5x672x348,5 mm
SK 30	96/98 l/min.	700 bar	128/131 kW	387,5 kg	1064,5x672x348,5 mm



Seria KE

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
KE 20	30 l/min.	300 bar	1450	18,4 kW	36 kg	387x341x196 mm
KE 22	37 l/min.	250 bar	1450	18,4 kW	36 kg	387x341x196 mm
KE 24	45 l/min.	210 bar	1450	18,4 kW	36 kg	387x341x196 mm
KE 28	61 l/min.	150 bar	1450	18,4 kW	36 kg	387x341x196 mm
KE 30	70 l/min.	130 bar	1450	18,4 kW	36 kg	387x341x196 mm



Seria KF

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
KF 28	93 l/min.	210 bar	1000	37,0 kW	69 kg	526x367x253 mm
KF 30	106 l/min.	200 bar	1000	40,0 kW	69 kg	526x367x253 mm
KF 36	122 l/min.	160 bar	800	37,0 kW	69 kg	526x367x253 mm
KF 40	137 l/min.	140 bar	900	37,0 kW	69 kg	526x367x253 mm
KF 40	153 l/min.	130 bar	1000	38,2 kW	69 kg	526x367x253 mm
KF 40	170 l/min.	110 bar	900	36,0 kW	69 kg	526x367x253 mm



Seria KS

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
KS 28	110 l/min.	250 bar	1500/1800/2200	52,5 kW	95 kg	582x483x261 mm
KS 32	145 l/min.	200 bar	1500/1800/2200	55,0 kW	95 kg	582x483x261 mm
KS 36	183 l/min.	160 bar	1500/1800/2200	56,0 kW	95 kg	582x483x261 mm
KS 40	226 l/min.	138 bar	1500/1800/2200	59,5 kW	95 kg	582x483x261 mm



Seria MS

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
MS 36	136 l/min.	300 bar	1500/1800/2200	75 kW	267 kg	709x604x308 mm
MS 40	167 l/min.	240 bar	1500/1800/2200	75 kW	267 kg	709x604x308 mm
MS 45	212 l/min.	190 bar	1500/1800/2200	75 kW	267 kg	709x604x308 mm
MS 50	262 l/min.	155 bar	1500/1800/2200	75 kW	267 kg	709x604x308 mm
MS 55	318 l/min.	125 bar	1500/1800/2200	75 kW	267 kg	709x604x308 mm




Seria MK



model	Przepływ	Ciśnienie max	Moc	Waga	Wymiary
MK 40	154/148 l/min.	400 bar	118 kW	393 kg	829x747x362 mm
MK 45	194/188 l/min.	300 bar	111 kW	393 kg	829x747x362 mm
MK 50	240/232 l/min.	250 bar	115 kW	393 kg	829x747x362 mm
MK 55	290/281 l/min.	200 bar	111 kW	407 kg	841x747x400 mm
MK 60	346/334 l/min.	170 bar	112 kW	407 kg	841x747x400 mm
MK 65	406/392 l/min.	150 bar	116 kW	407 kg	841x747x400 mm



Seria MKS

model	Przepływ	Ciśnienie max	Moc	Waga	Wymiary
MKS 40	182/184 l/min.	400 bar	140,5 kW	393 kg	829x747x362 mm
MKS 45	231/233 l/min.	300 bar	134,0 kW	393 kg	829x747x362 mm
MKS 50	285/288 l/min.	250 bar	137,5 kW	393 kg	829x747x362 mm
MKS 55	345/348 l/min.	200 bar	132,0 kW	407 kg	841x747x400 mm
MKS 60	410/414 l/min.	170 bar	135,0 kW	407 kg	841x747x400 mm
MKS 65	481/486 l/min.	150 bar	140,0 kW	407 kg	841x747x400 mm

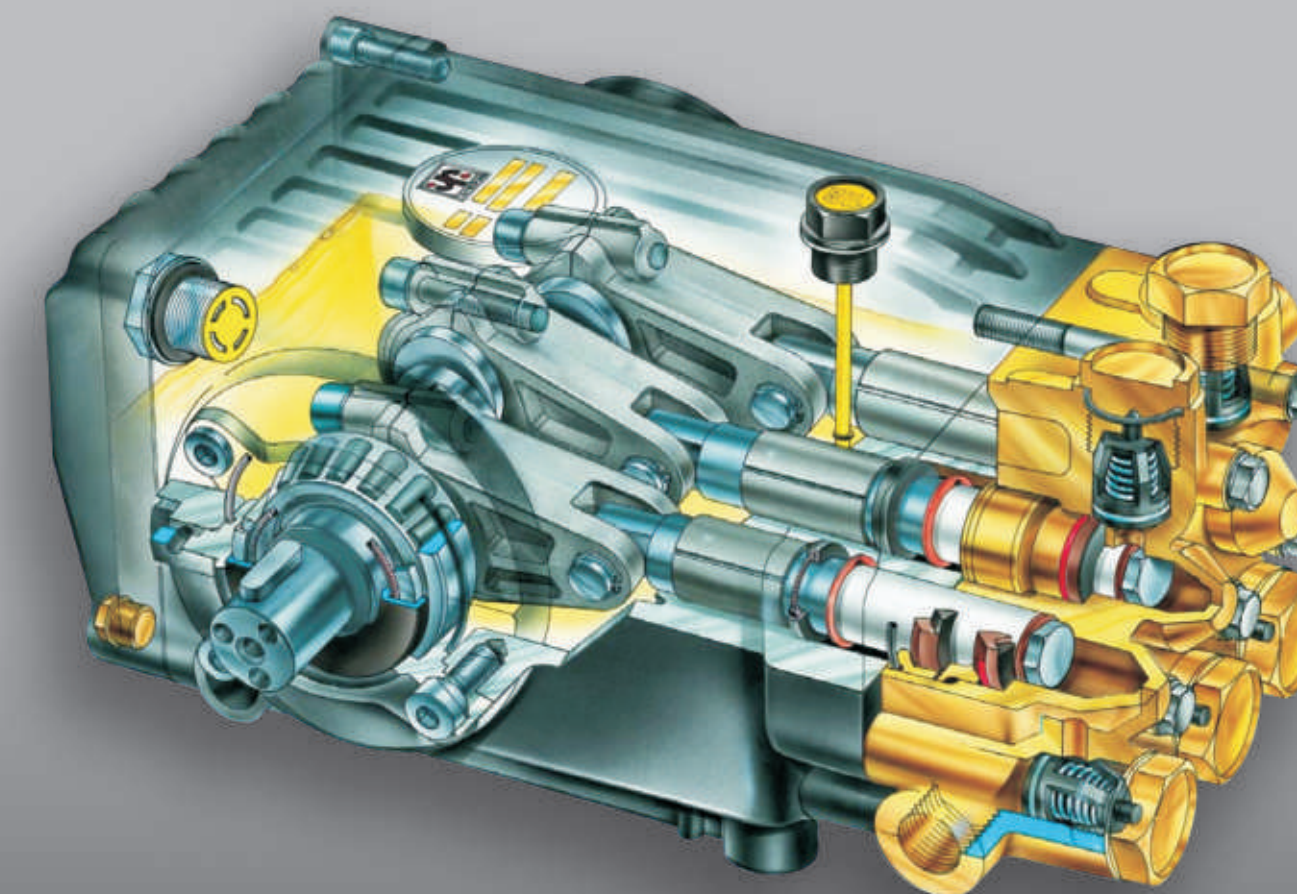


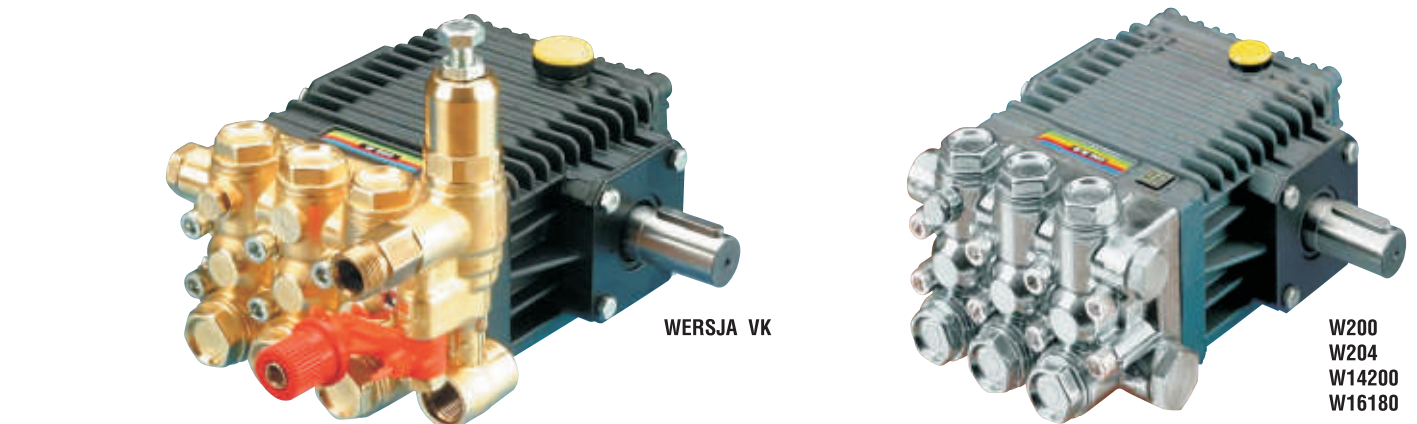
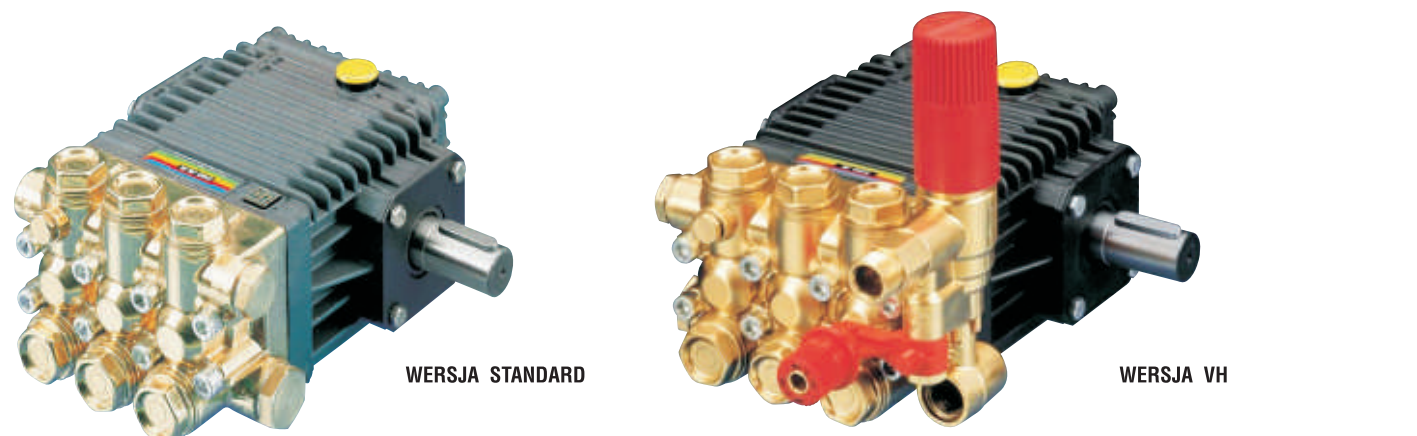


model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
Model 44 W150	8 l/min.	150 bar	1450	2,20 kW	7,9 kg	225x221x139 mm
Model 44 W130	9,5 l/min.	130 bar	1450	2,20 kW	7,9 kg	225x221x139 mm
Model 44 W170	9,5 l/min.	170 bar	1450	2,94 kW	7,9 kg	225x221x139 mm
Model 44 W112	12 l/min.	100 bar	1450	2,20 kW	7,7 kg	225x221x139 mm
Model 44 W140	12 l/min.	140 bar	1450	2,94 kW	7,7 kg	225x221x139 mm
Model 44 W200	12 l/min.	200 bar	1450	4,41 kW	7,7 kg	225x221x139 mm
Model 44 W97	14 l/min.	90 bar	1450	2,20 kW	7,7 kg	225x221x139 mm
Model 44 W124	14 l/min.	120 bar	1450	2,94 kW	7,7 kg	225x221x139 mm
Model 44 W154	14 l/min.	150 bar	1450	4,04 kW	7,7 kg	225x221x139 mm
Model 44 W204	14 l/min.	200 bar	1450	5,37 kW	7,7 kg	225x221x139 mm

Model 44 W950	9,5 l/min.	165 bar	1750	2,94 kW	7,9 kg	225x221x139 mm
Model 44 W951	11,5 l/min.	103 bar	1750	2,20 kW	7,9 kg	225x221x139 mm
Model 44 W952	11,5 l/min.	138 bar	1750	2,94 kW	7,9 kg	225x221x139 mm
Model 44 W953	11,5 l/min.	172 bar	1750	3,67 kW	7,9 kg	225x221x139 mm
Model 44 W954	13,6 l/min.	90 bar	1750	2,20 kW	7,7 kg	225x221x139 mm
Model 44 W955	13,6 l/min.	117 bar	1750	2,94 kW	7,7 kg	225x221x139 mm
Model 44 W956	13,6 l/min.	145 bar	1750	3,67 kW	7,7 kg	225x221x139 mm
Model 44 W14200	13,6 l/min.	200 bar	1750	5,14 kW	7,7 kg	225x221x139 mm
Model 44 W957	15,9 l/min.	76 bar	1750	2,20 kW	7,7 kg	225x221x139 mm
Model 44 W958	15,9 l/min.	96 bar	1750	2,94 kW	7,7 kg	225x221x139 mm
Model 44 W959	15,9 l/min.	124 bar	1750	3,67 kW	7,7 kg	225x221x139 mm
Model 44 W16180	15,9 l/min.	180 bar	1750	5,51 kW	7,7 kg	225x221x139 mm

Model 44 WW186	13 l/min.	180 bar	2800	4,04 kW	7,9 kg	225x221x139 mm
Model 44 WW206	13 l/min.	200 bar	2800	5,51 kW	7,9 kg	225x221x139 mm
Model 44 WW116	15 l/min.	110 bar	2800	2,94 kW	7,9 kg	225x221x139 mm
Model 44 WW156	15 l/min.	150 bar	2800	4,04 kW	7,9 kg	225x221x139 mm
Model 44 WW209	15 l/min.	200 bar	2800	5,51 kW	7,9 kg	225x221x139 mm
Model 44 WW189	16 l/min.	180 bar	2800	5,51 kW	7,9 kg	225x221x139 mm
Model 44 WW136	17 l/min.	130 bar	2800	4,04 kW	7,9 kg	225x221x139 mm
Model 44 WW176	17 l/min.	170 bar	2800	5,51 kW	7,9 kg	225x221x139 mm

Model 44 WW963	11 l/min.	250 bar	3400	5,51 kW	8,7 kg	225x245x164 mm
Model 44 WW964	13 l/min.	250 bar	3400	6,25 kW	8,7 kg	225x245x164 mm
Model 44 WW960	13,2 l/min.	172 bar	3400	4,04 kW	8,7 kg	225x245x164 mm
Model 44 WW961	15 l/min.	172 bar	3400	4,77 kW	8,7 kg	225x245x164 mm
Model 44 WW965	15 l/min.	250 bar	3400	7,35 kW	8,7 kg	225x245x164 mm
Model 44 WW962	17,4 l/min.	172 bar	3400	5,51 kW	8,7 kg	225x245x164 mm

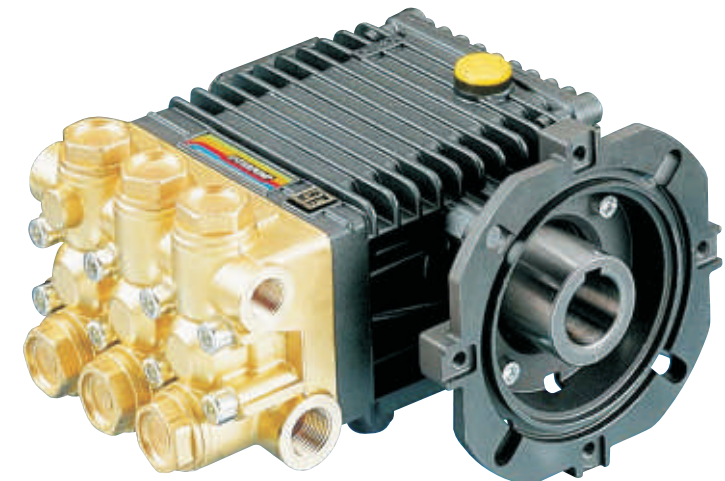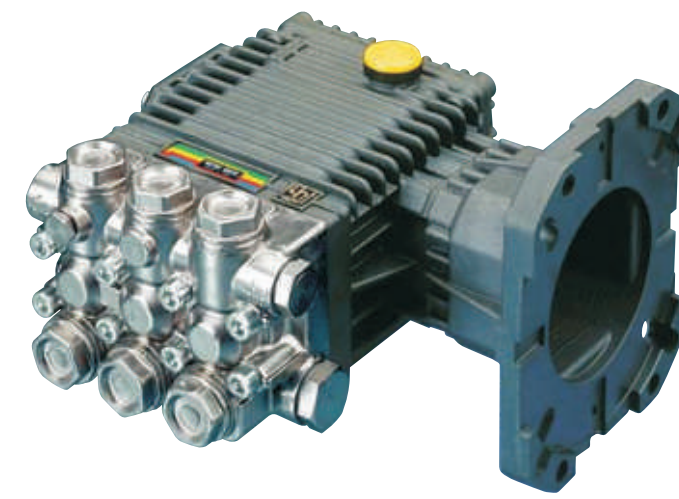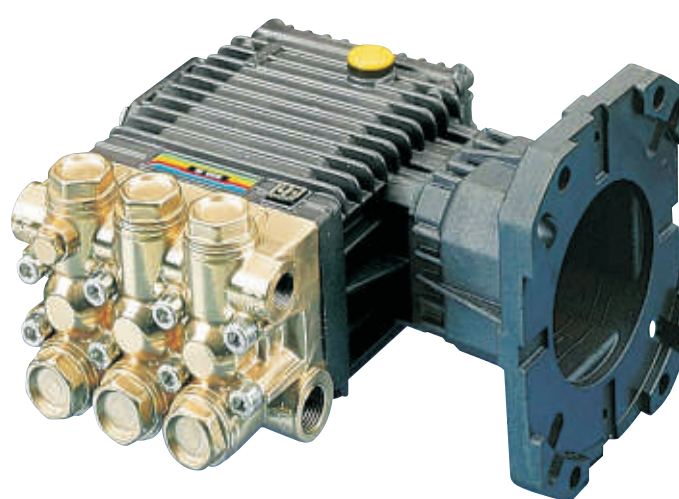

model	Przepływ	Ciśnienie max	r.p.m	Moc
Model 44 W950A	9,5 l/min.	165 bar	1750	2,94 kW
Model 44 W951A	11,5 l/min.	103 bar	1750	2,20 kW
Model 44 W952A	11,5 l/min.	138 bar	1750	2,94 kW
Model 44 W953A	11,5 l/min.	172 bar	1750	3,67 kW
Model 44 W954A	13,6 l/min.	90 bar	1750	2,20 kW
Model 44 W955A	13,6 l/min.	117 bar	1750	2,94 kW
Model 44 W956A	13,6 l/min.	145 bar	1750	3,67 kW
Model 44 W14200A	13,6 l/min.	200 bar	1750	5,14 kW
Model 44 W957A	15,9 l/min.	76 bar	1750	2,20 kW
Model 44 W958A	15,9 l/min.	96 bar	1750	2,94 kW
Model 44 W959A	15,9 l/min.	124 bar	1750	3,67 kW
Model 44 W16180A	15,9 l/min.	180 bar	1750	5,51 kW

Model W150B	8 l/min.	150 bar	1450	2,20 kW
Model W130B	9,5 l/min.	130 bar	1450	2,20 kW
Model W170B	9,5 l/min.	170 bar	1450	2,94 kW
Model W112B	12 l/min.	100 bar	1450	2,20 kW
Model W140B	12 l/min.	140 bar	1450	2,94 kW
Model W200B	12 l/min.	200 bar	1450	4,41 kW
Model W97B	14 l/min.	90 bar	1450	2,20 kW
Model W124B	14 l/min.	120 bar	1450	2,94 kW
Model W154B	14 l/min.	150 bar	1450	4,04 kW
Model W204B	14 l/min.	200 bar	1450	5,37 kW

Model WW186B	13 l/min.	180 bar	2800	4,04 kW
Model WW206B	13 l/min.	200 bar	2800	5,51 kW
Model WW116B	15 l/min.	110 bar	2800	2,94 kW
Model WW156B	15 l/min.	150 bar	2800	4,04 kW
Model WW209B	15 l/min.	200 bar	2800	5,51 kW
Model WW136B	17 l/min.	130 bar	2800	4,04 kW
Model WW176B	17 l/min.	170 bar	2800	5,51 kW

Model WW960C 1"	13,2 l/min.	172 bar	3400	4,04 kW
Model WW961C 1"	15 l/min.	172 bar	3400	4,77 kW
Model WW962C 1"	17,4 l/min.	172 bar	3400	5,51 kW

Model WW963C 1"	11 l/min.	250 bar	3400	5,51 kW
Model WW964C 1"	13 l/min.	250 bar	3400	6,25 kW
Model WW965C 1"	15 l/min.	250 bar	3400	7,35 kW



model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
Model 47 W914	15 l/min.	130 bar	1750	3,67 kW	14 kg	298x224x176 mm
Model 47 W912	18 l/min.	100 bar	1750	3,67 kW	14 kg	298x224x176 mm
Model 47 W910	21 l/min.	100 bar	1750	4,04 kW	14,5 kg	321x224x176 mm

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
Model 47 W101	15 l/min.	100 bar	1000	2,94 kW	14 kg	298x252x176 mm
Model 47 W131	15 l/min.	130 bar	1000	4,04 kW	14,5 kg	321x224x176 mm
Model 47 W151	15 l/min.	150 bar	1000	4,04 kW	14,5 kg	321x224x176 mm
Model 47 W92	18 l/min.	90 bar	1000	2,94 kW	14 kg	298x252x176 mm
Model 47 W132	18 l/min.	130 bar	1000	4,04 kW	14,5 kg	321x224x176 mm

Model 47 WS171	13 l/min.	170 bar	1450	4,04 kW	14,5 kg	321x224x176 mm
Model 47 WS133	13 l/min.	120 bar	1450	2,94 kW	14 kg	298x224x176 mm
Model 47 WS101	15 l/min.	100 bar	1450	2,94 kW	14 kg	298x224x176 mm
Model 47 WS131	15 l/min.	130 bar	1450	4,04 kW	14,5 kg	321x224x176 mm
Model 47 WS151	15 l/min.	150 bar	1450	4,04 kW	14,5 kg	321x224x176 mm
Model 47 WS92	18 l/min.	90 bar	1450	2,94 kW	14 kg	298x224x176 mm
Model 47 WS132	18,7 l/min.	120 bar	1450	4,04 kW	14,5 kg	321x224x176 mm
Model 47 WS82	21 l/min.	80 bar	1450	2,94 kW	14 kg	298x224x176 mm
Model 47 WS102	21 l/min.	100 bar	1450	4,04 kW	14,5 kg	321x224x176 mm

Model 47 W913	15 l/min.	130 bar	1750	3,67 kW	14 kg	298x224x176 mm
Model 47 W912	18 l/min.	100 bar	1750	3,67 kW	14 kg	298x224x176 mm
Model 47 W914	21 l/min.	100 bar	1750	4,04 kW	14,5 kg	321x224x176 mm


model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
Model 47 W201	15 l/min.	200 bar	1000	5,51 kW	14,5 kg	321x252x176 mm
Model 47 W162	18 l/min.	160 bar	1000	5,51 kW	14,5 kg	321x252x176 mm

Model 47 WS201	15 l/min.	200 bar	1450	5,51 kW	14,5 kg	321x224x176 mm
Model 47 WS162	18 l/min.	160 bar	1450	5,51 kW	14,5 kg	321x224x176 mm
Model 47 WS152	21 l/min.	150 bar	1450	5,51 kW	14,5 kg	321x224x176 mm
Model 47 WS202	21 l/min.	200 bar	1450	7,35 kW	14,5 kg	321x224x176 mm

Model 47 W921	15 l/min.	200 bar	1750	5,51 kW	14,5 kg	321x224x176 mm
Model 47 W916	18 l/min.	160 bar	1750	5,51 kW	14,5 kg	321x224x176 mm
Model 47 W922	21 l/min.	200 bar	1750	7,35 kW	14,5 kg	321x224x176 mm



Model 47 WS1630	30 l/min.	160 bar	1450	9,2 kW	15 kg	326x234x180 mm
Model 47 W928	15 l/min.	275 bar	1750	8,08 kW	14,5 kg	321x234x176 mm

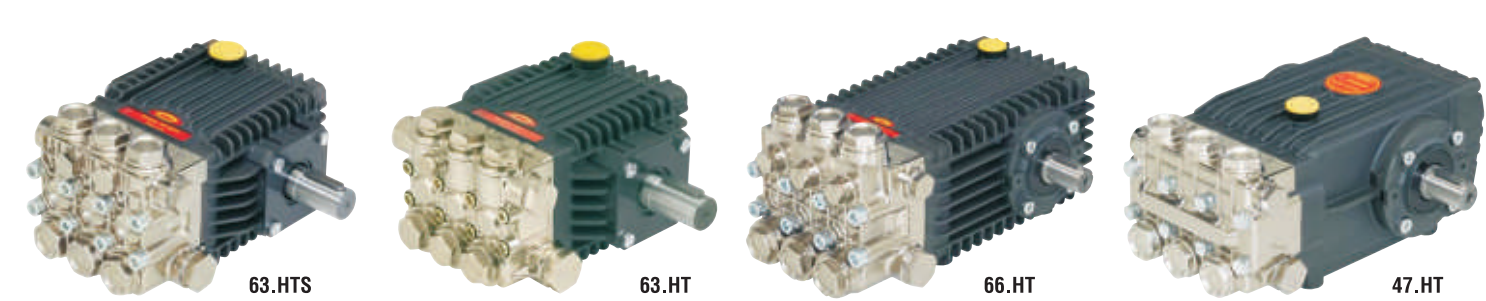

model	Przepływ	Ciśnienie max	r.p.m	Moc	Waga	Wymiary
Model HT6004	4,5 l/min.	150 bar	1450	1,29 kW	6,05 kg	193,5x202,5x125 mm
Model HT6007	7 l/min.	150 bar	1450	2,00 kW	6,05 kg	193,5x202,5x125 mm
Model HT6008	10 l/min.	150 bar	1450	2,94 kW	6,05 kg	193,5x202,5x125 mm
	8 l/min.	150 bar	1450	2,29 kW	6,05 kg	193,5x202,5x125 mm

Model HTS6311	11 l/min.	140 bar	1450	2,94 kW	8,15 kg	213,5x211x119,5 mm
Model HTS6313	13 l/min.	170 bar	1450	4,04 kW	8,15 kg	213,5x211x119,5 mm
Model HTS6315	15 l/min.	140 bar	1750	4,04 kW	8,15 kg	213,5x211x119,5 mm

Model HT4715	15 l/min.	160 bar	1450	4,56 kW	14,5 kg	315,5x254,5x146 mm
	10 l/min.	160 bar	950	3,05 kW	14,5 kg	315,5x254,5x146 mm
Model HT4718	18 l/min.	160 bar	1450	5,51 kW	14,5 kg	315,5x254,5x146 mm
	12 l/min.	160 bar	950	3,67 kW	14,5 kg	315,5x254,5x146 mm
Model HT4721	21 l/min.	140 bar	1450	5,51 kW	14,5 kg	315,5x254,5x146 mm
	17 l/min.	160 bar	1200	5,15 kW	14,5 kg	315,5x254,5x146 mm
	13 l/min.	160 bar	950	3,97 kW	14,5 kg	315,5x254,5x146 mm
Model HT4723	23 l/min.	160 bar	1450	7,35 kW	14,5 kg	315,5x254,5x146 mm
	19 l/min.	160 bar	1200	5,8 kW	14,5 kg	315,5x254,5x146 mm
	15 l/min.	160 bar	950	4,58 kW	14,5 kg	315,5x254,5x146 mm

HT6628	28 l/min.	250 bar	1750	13,38 kW	18,5 kg	340,5x248,5x159,5 mm
	19 l/min.	250 bar	1200	9,07 kW	18,5 kg	340,5x248,5x159,5 mm
	15 l/min.	250 bar	950	7,35 kW	18,5 kg	340,5x248,5x159,5 mm
HT6639	39 l/min.	200 bar	1750	14,7 kW	18,5 kg	340,5x248,5x159,5 mm
	32 l/min.	200 bar	1450	12,2 kW	18,5 kg	340,5x248,5x159,5 mm
HT6646	46 l/min.	170 bar	1750	14,7 kW	18,5 kg	340,5x248,5x159,5 mm
	38 l/min.	200 bar	1450	14,51 kW	18,5 kg	340,5x248,5x159,5 mm

HT6968	68 l/min.	80 bar	1000	11,02 kW	25,8 kg	360x300x210 mm
HT7095H	100 l/min.	90 bar	1450	17,2 kW	37 kg	387x340,5x196 mm
	95 l/min.	100 bar	1350	18,2 kW	37 kg	387x340,5x196 mm
	85 l/min.	100 bar	1200	16,3 kW	37 kg	387x340,5x196 mm

HT71150	
---------	--